

## CFR FULL RANGE CEILING SPEAKER

The G9 CFR series ceiling speaker is a true full range ceiling speaker that has been tuned to give a full range performance with that all important acoustic depth. The challenge was to provide not only the frequency range, but the depth of sound that you might expect from a quality wall mounted loudspeaker, but for reasons of aesthetics, space constraints and budgetary needs, a ceiling installation is required. The quality of sound reproduction in the CFR series has been made possible by applying the well known design principles that go in to a quality wall mounted loudspeakers.



The G9 CFR series ceiling speakers are made to exacting standards with the front mounting section formed from ABS plastic, while the back section fitting is made of Iron. There are easy to use + - push fitting on the Iron back panel for connection. The flexibility of the ceiling speaker allows use at 8 Ohms, as well as settings in the 100 and 70 Volt line range. Set the rotary switch at the rear of the speaker housing mounted on the Iron back panel according to your system need and the in-built transformer will be set for use. The range of settings being standard 8 Ohm, with settings for 100 volt line being: 30w/15w/7.5w/3.8w. At 70 volt line the settings are: 30w/15w/7.5w/3.8w/1.9w. Four secure plastic screw down terminal arms ensure a firm fitting to the ceiling aperture.

The G9 CFR series ceiling speaker range not only sounds good, but is also flexible in allowing you to use it with a variety of power inputs, making those unexpected installations surprises more easy to handle. The quality of material used will ensure years of reliability, while giving you the professional and clear sound that you can rely on to do the job day in and day out.



NOTE: G9 RESERVES THE RIGHT TO CHANGE SPECIFICATION WITHOUT NOTICE.



With the introduction of the CFR series ceiling speaker, G9 offers you a quality audio solution for low cost, space saving ceiling installations. G9 continue to maintain their philosophy in providing customers with intelligent sound solutions that make a marked difference when it comes to audio quality, no matter what the requirement or budget may be.

### Uses

- Conference centres
- Hotel bar and zone areas
- Hotel bedrooms
- School classrooms and zone areas
- Hospital rooms and zone areas
- Airport zones and business waiting rooms
- All uses where quality full range audio is required with ceiling installations

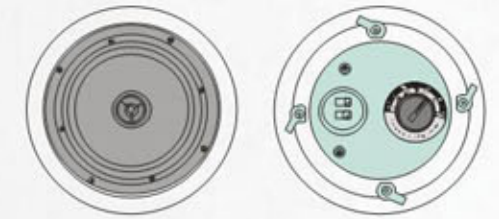

*Audio Logical*

### CFR series Specifications

	CFR-5	CFR-6	CFR-8
Material(panel):	ABS	ABS	ABS
Material(cover):	Iron	Iron	Iron
Frequency response:	100Hz~20KHz	90Hz~20KHz	50Hz~20KHz
Power handling:	2.5/5/10/20W/8Ω	3.8/7.5/15/30W/8Ω	5/10/20/40W/8Ω
Sensitivity:	88dB	88dB	88dB
Driver:	5"	6"	8"
Transformer			
Option:	100V/70V line	100V/70V line	100V/70V line
Cut out hole size:	Ø170mm	Ø200mm	Ø240mm
Dimension:	Ø203*145mm	Ø230*150mm	Ø270*185mm
Weight(kg):	1.8	2.3	3.1

NOTE: G9 RESERVES THE RIGHT TO CHANGE SPECIFICATION WITHOUT NOTICE.