

G-15 Full-Range Enclosure

The G-15 is the top of the range "G" series design philosophy and there is no compromise with this 15" + 2" full-range loudspeaker cabinet. The passive G-15 has a 60° x 40° Horn and is designed to work in singles, or as cluster arrays for a powerful, smooth and gutsy PA system. The shape and efficiency of the G-15 also makes this a great floor monitor.

The G-15 is fitted with the unique G-Phase passive crossover, ensuring not only the correct crossover point for excellent sound and speaker protection, but it also accurately puts a delay between the LF and HF drivers allowing the cabinet to sound natural, smooth and powerful, not hurting your ears with frequencies that are out of alignment.

The cabinet is made of quality 15mm Baltic plywood, rebated, screwed and glued for sound integrity and strength. The shape and build allows for maximum SPL, while accommodating two built-in handles to the case at the optimum carrying point. The metal grille is 1.5mm carbon steel and the cabinet is sprayed with a strong protective textured black paint for true resilience. There are 12 x M10 "L" bracket threaded fixing points for installation, plus 4 x M8 standard bracket mounting points on the rear. Fittings include a 35mm pole mount "Top hat" and 2 x Speakon NL4MP recessed connectors.




Natasha Marsh Cathedral Concert tour UK using G9 PA and monitoring

NOTE: G9 RESERVES THE RIGHT TO CHANGE SPECIFICATION



The G-15 full-range loudspeaker enclosure is a powerful PA contender, giving an all-round sound that will fill venues with superbly balanced sound. The G-15 audio performance more than competes in this range of sound reinforcement and will do the job, day in day out. Fitted with a G-Phase frequency crossover the G-15 is a cost effective balanced system by itself and when matched with the G-218B Bass, the frequency coverage is exceptional. The G-15 shape and design also allows it to be used as an excellent stage monitor, making it a flexible cabinet for venues and on the road.

The outstanding sound and performance of G-15 makes it a perfect choice for Clubs and live venues, including Theatre use. The G-15 is well built for the road and is fitted with cast-chassis neodymium drivers that both deliver the power, while being as light as possible. There is no better choice than the G-15 in its class!

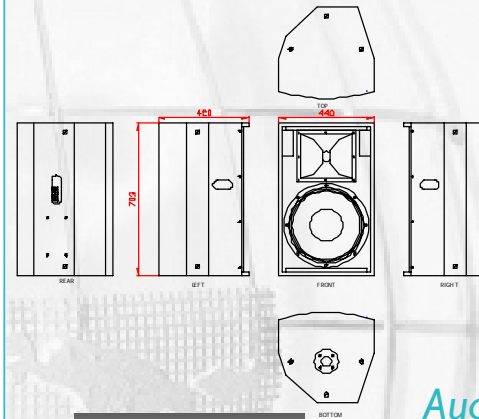

- G15 FULL RANGE**
- 15 INCH + 2 INCH
- PASSIVE CROSSOVER
- PARALLEL CONNECTIONS
- PA CABINET
- DELAY SYSTEMS
- FLOOR WEDGE



Audio Logical!

G15 Specifications

| | |
|------------------------------|---|
| Enclosure Type: | 2-way reflex loaded |
| Enclosure Build: | 15 mm Baltic Birch plywood, rebated, screwed & glued. |
| Frequency Response: | 62Hz - 18kHz ± 3dB |
| Sensitivity: | 97dB (1w/1m) |
| Dispersion: | 60° x 40° |
| Power Handling: | 550w RMS / 1100w program |
| Maximum SPL: | 129dB continuous 135dB peak |
| Nominal Impedence: | 8 Ohms |
| Drive Units: | 1 x 15" (381 mm) LF cone drive unit. 1 x 2" (50 mm) HF compression drive unit. |
| Crossover: | G-Phase design. |
| Connectors | 2 x Speakon NL4MP |
| Rigging & Suspension: | 12 x M10 threaded fixings + 4 x M8 for Omnimount & Powerdrive fitting + 35mm pole mount. |
| Dimensions WxDxH mm: | 440mm x 420mm x 703mm |
| Boxed size WxDxH mm: | 504mm x 524mm x 787mm |
| Weight Net / Gross Shipping: | 30kg / 33kg |

NOTE: G9 RESERVES THE RIGHT TO CHANGE SPECIFICATION WITHOUT NOTICE.